



800.654.5635 • www.csidesigns.com

# Performance Curves

## SolidC-4, 60 Hz


Motor: **3600 rpm. synchron.**  
 Tolerance:  $\pm 8\%$  for Q  
 $\pm 6\%$  for H  
 Impeller, Max. dia.: 9.84"  
 Impeller, Min. dia.: 7.87"  
 Pump inlet, Dia.: 3"  
 Pump outlet, Dia.: 2"

Performance data refer to water at 68°F (20°C)

**NOTE!**

The curves refer to motor: 33.5 Hp (25 kW), 3555 rpm. asynchr., 60 Hz.

DO NOT FORGET THE SAFETY FACTOR.

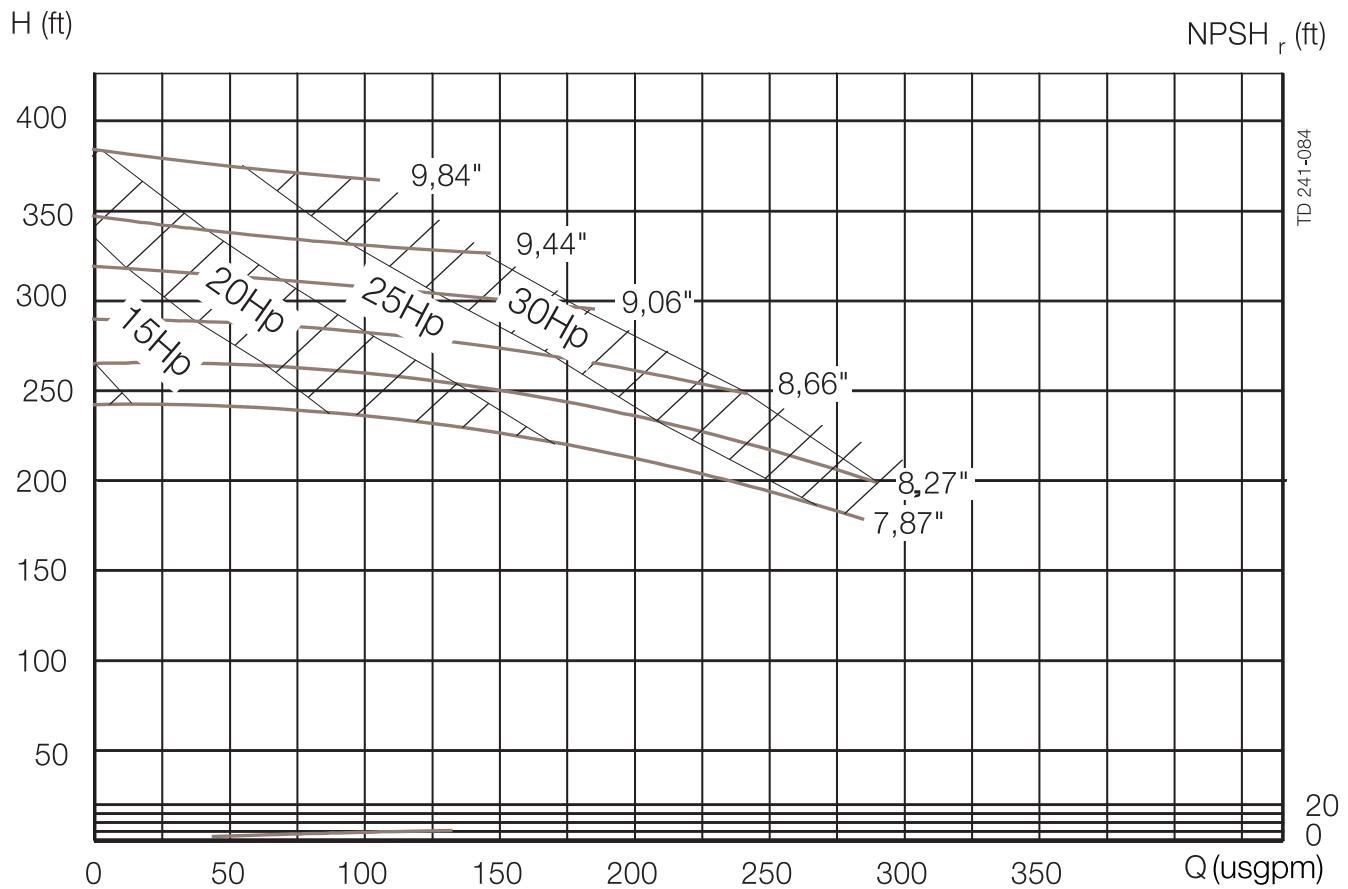

TD 241-084

20  
0