






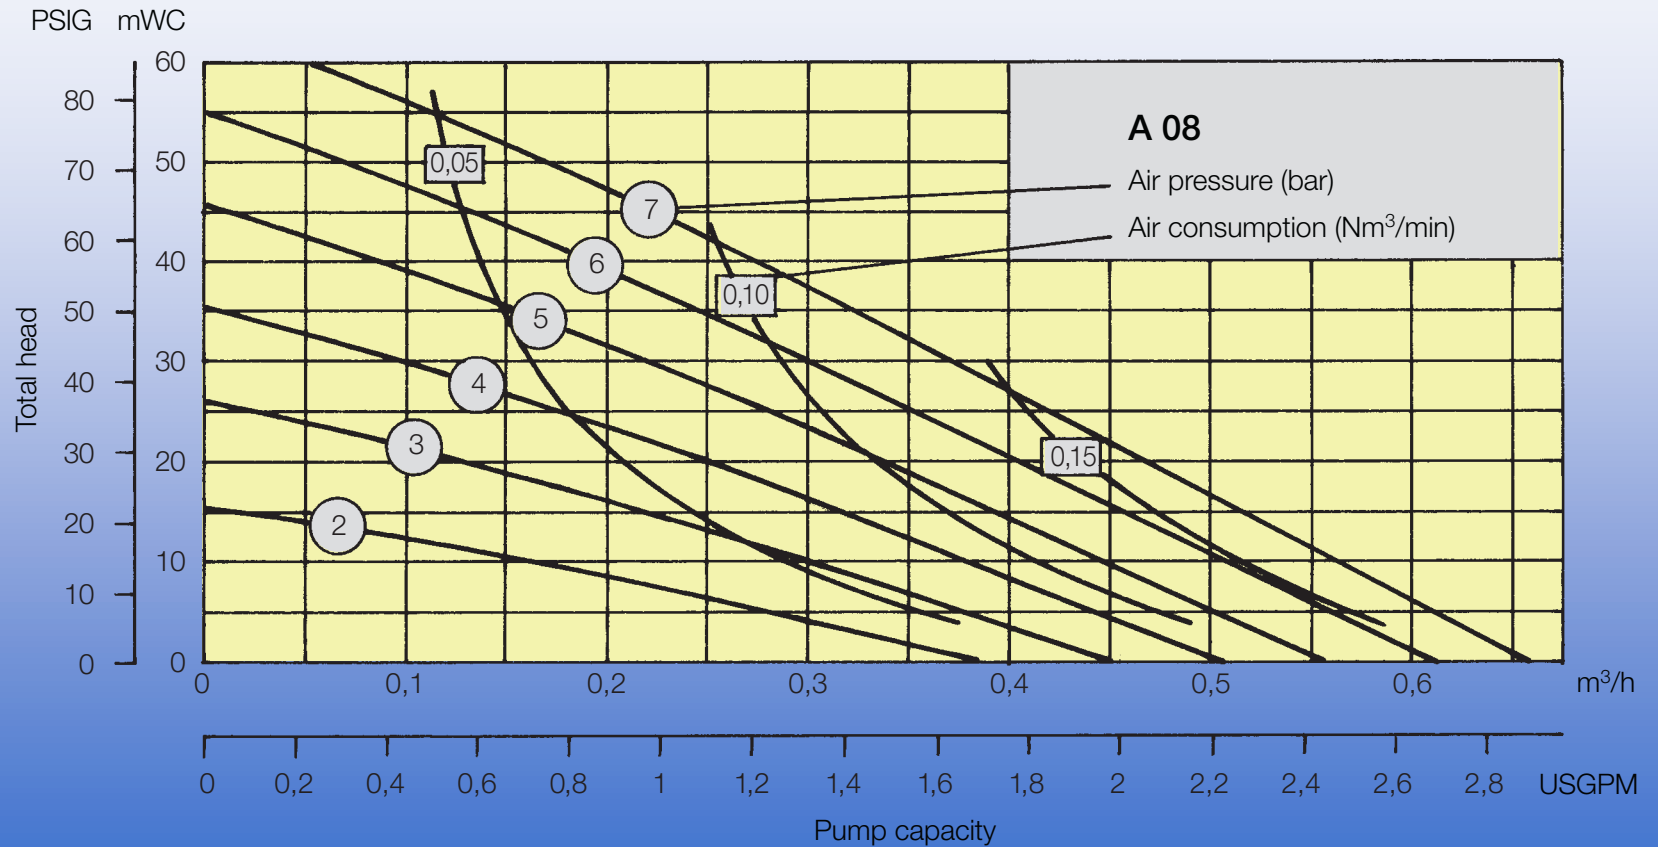



Performance range A-Series

-  A 08
-  A 10
-  A 15
-  A 25
-  A 40
-  A 50


The data refer to water. Pay attention to the influence of the product viscosity to the pump capacity. 




The Specialists for Pneumatic Diaphragm Pumps

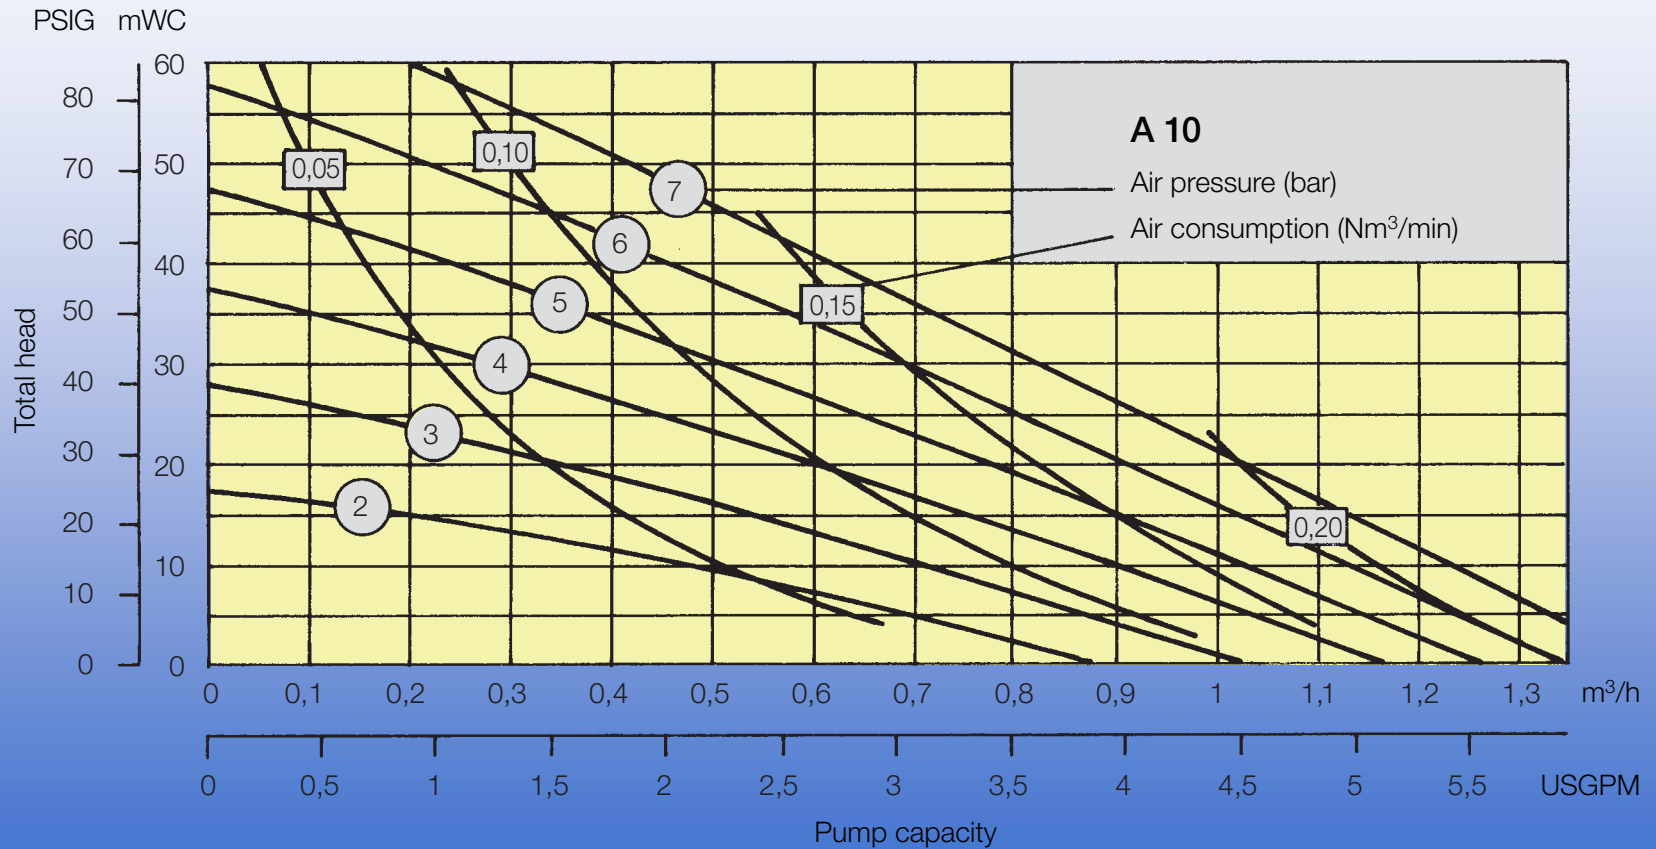


The Specialists for Pneumatic Diaphragm Pumps

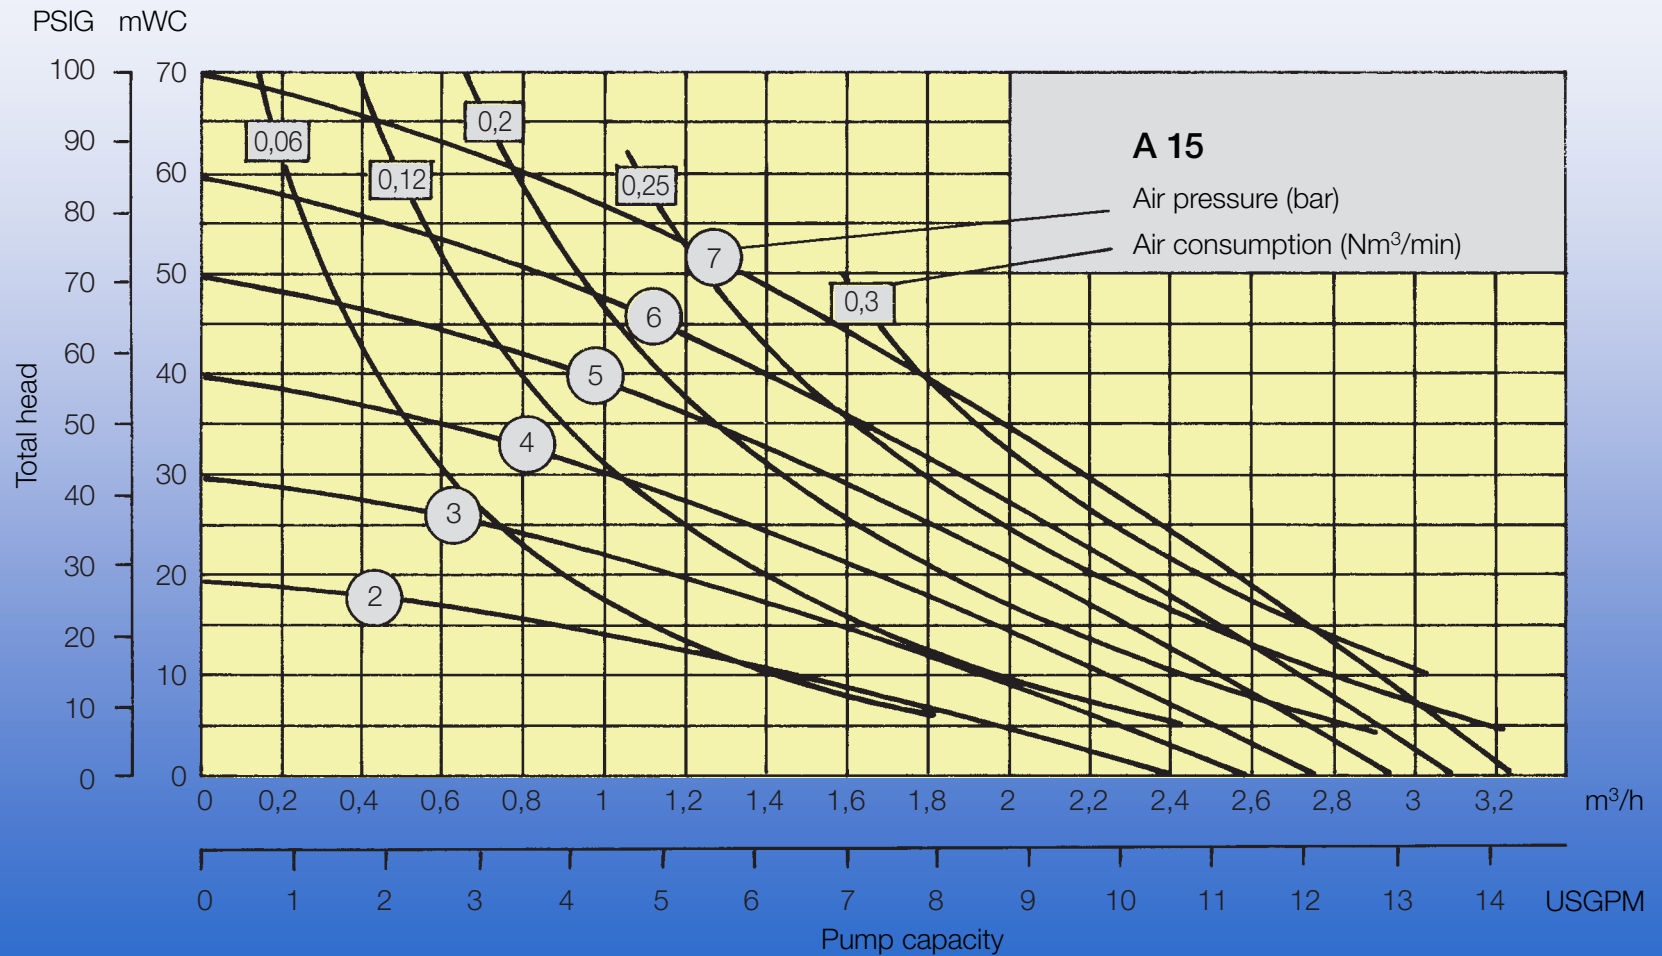


The Specialists for Pneumatic Diaphragm Pumps

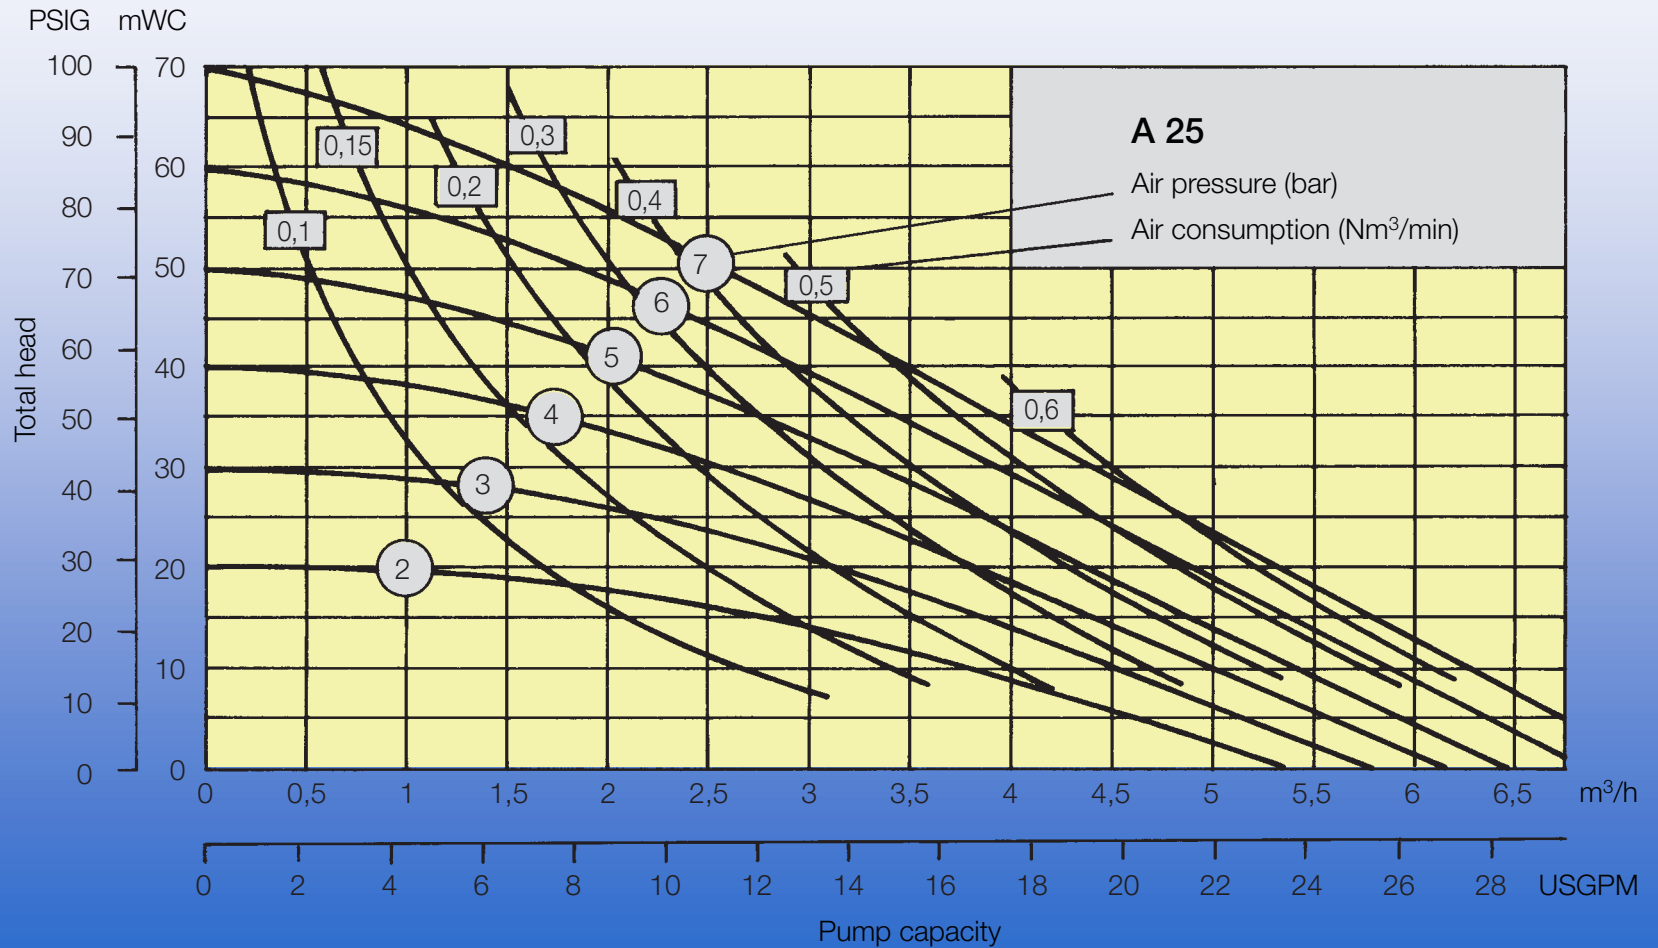

The Specialists for Pneumatic Diaphragm Pumps

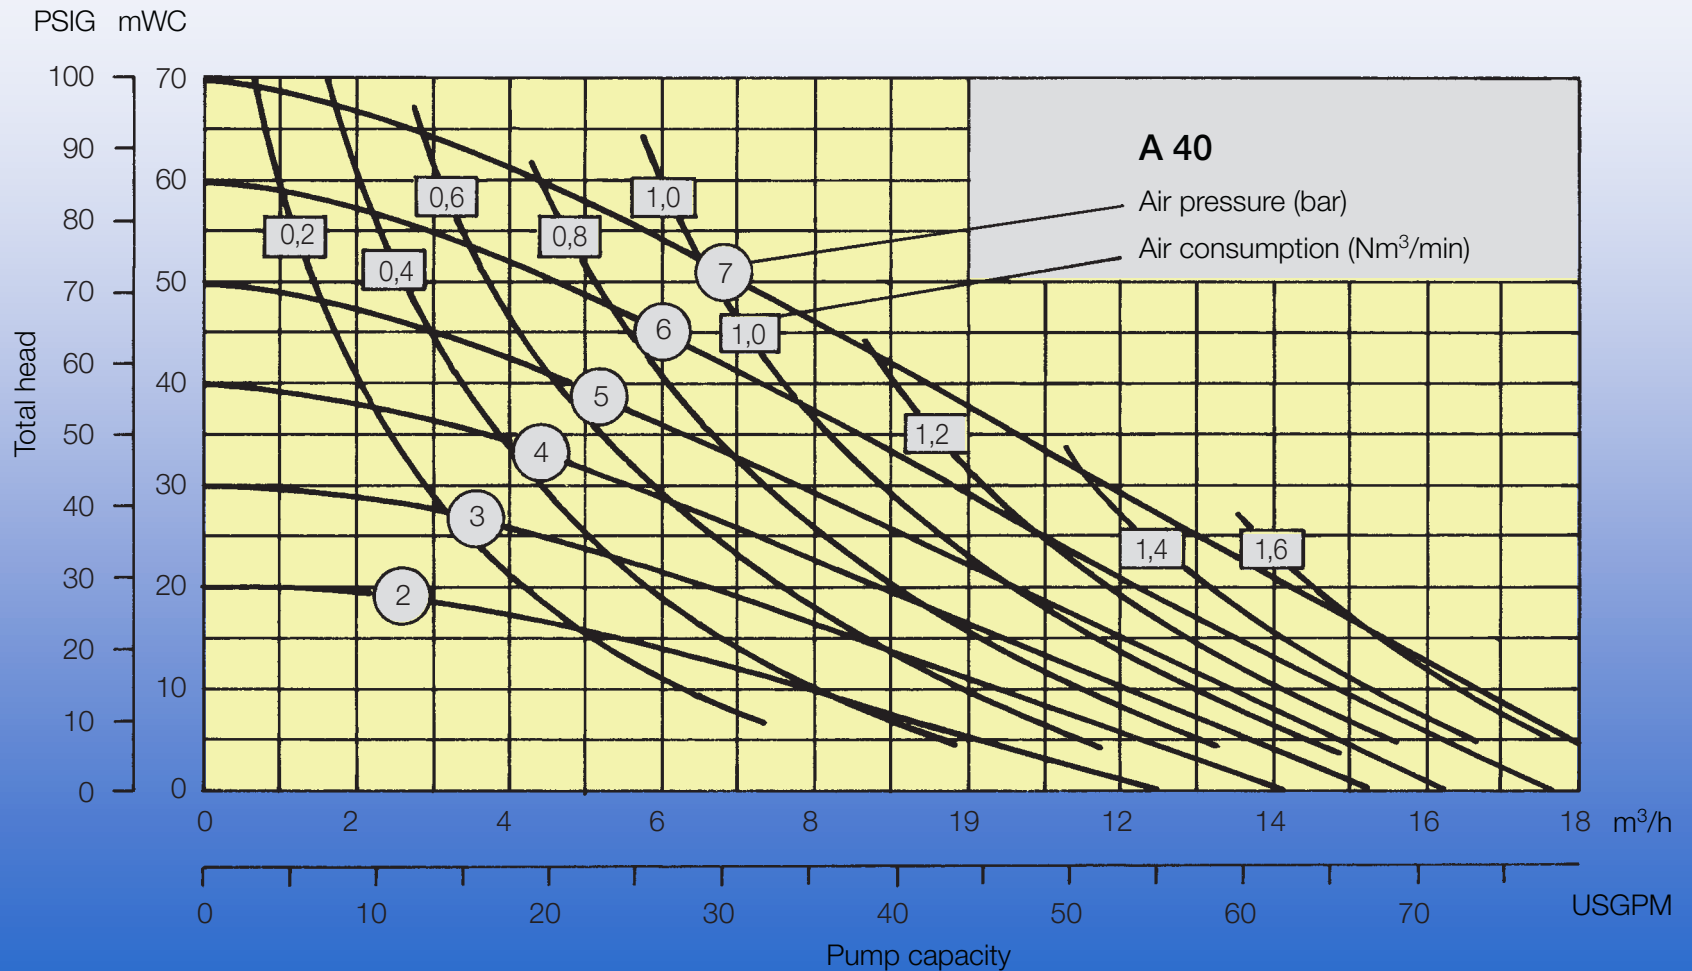


The Specialists for Pneumatic Diaphragm Pumps

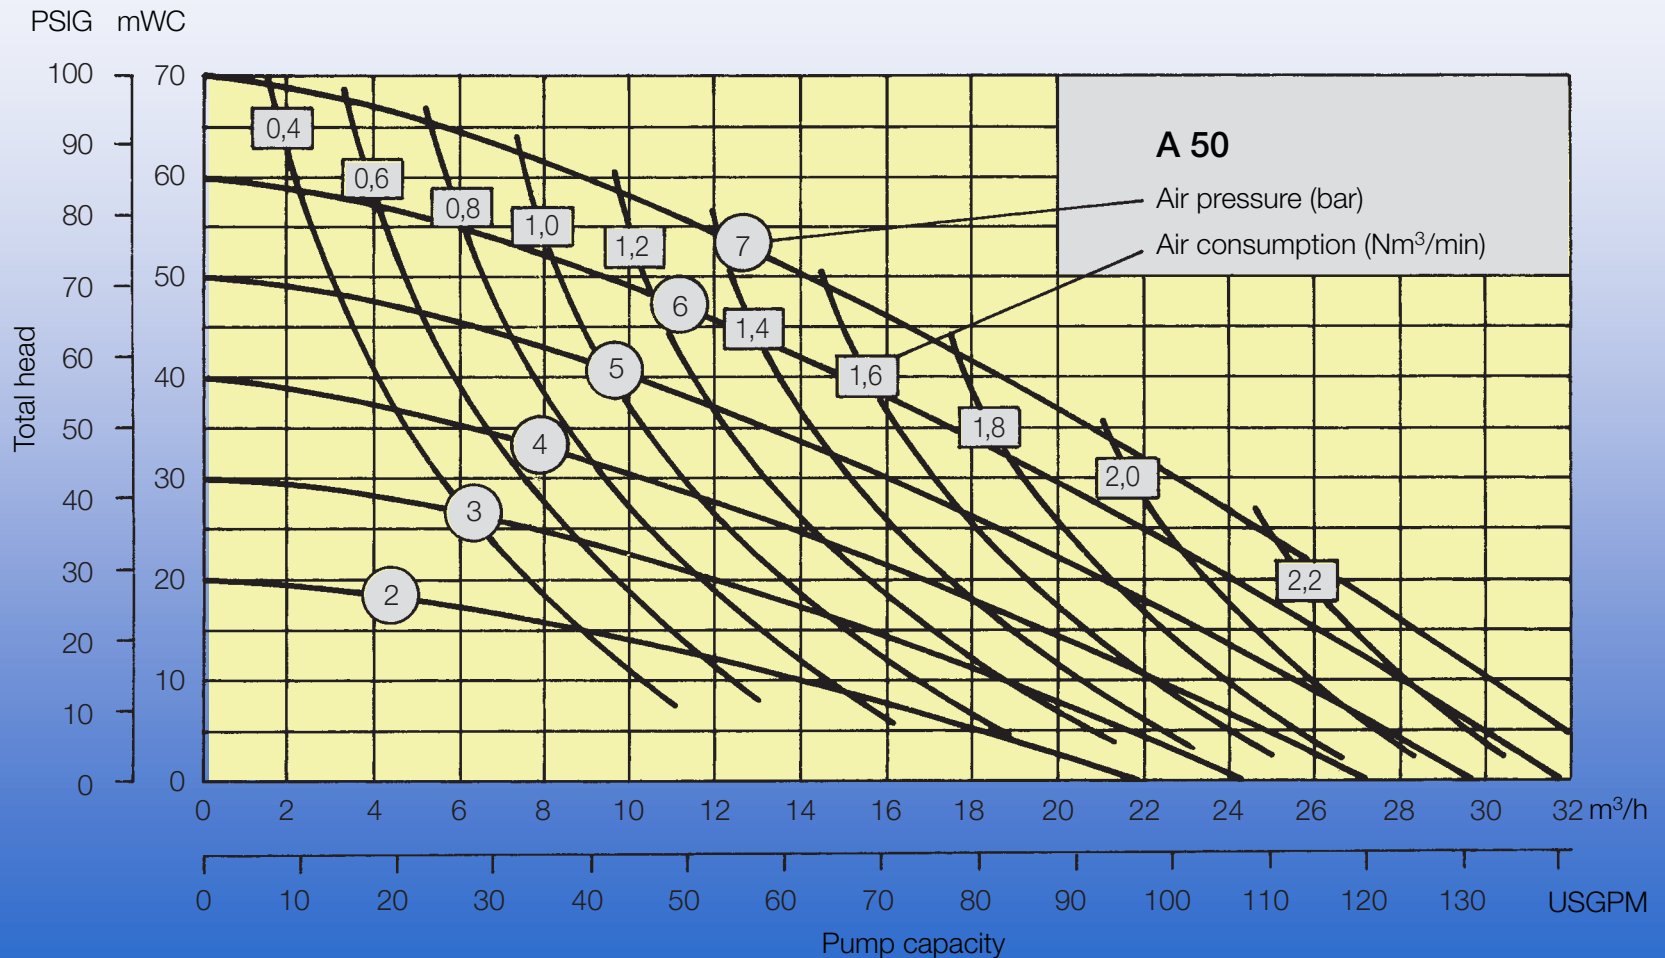

The Specialists for Pneumatic Diaphragm Pumps

Product viscosity

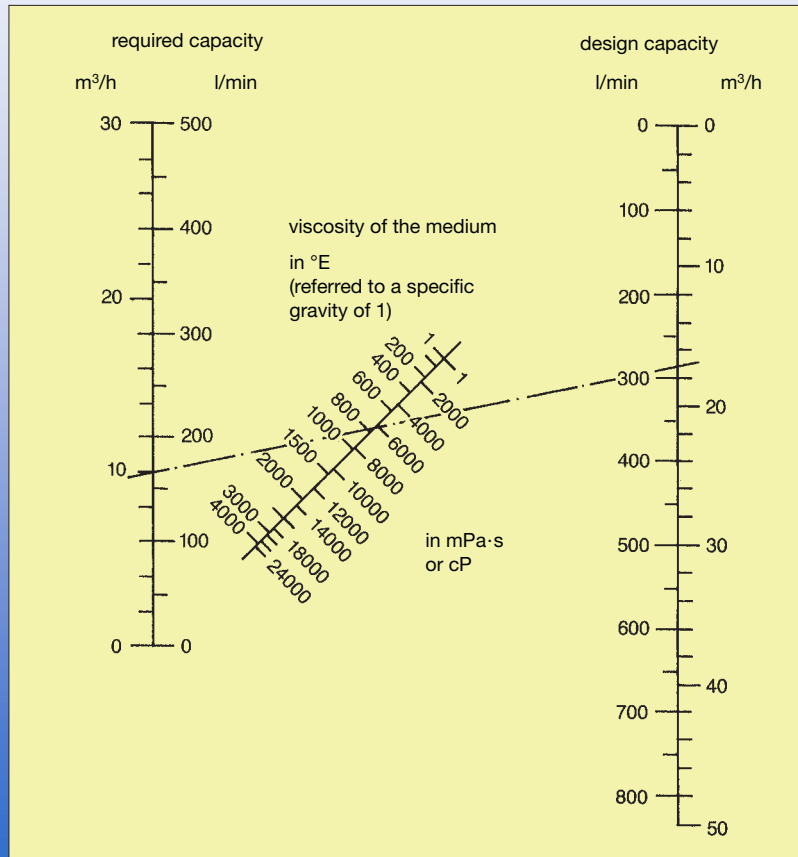

The capacity specified in the pump performance charts generally refer to water (1 mPas).

The value must be reduced correspondingly when pumping liquids with higher viscosity. The design capacity can be read off directly from the graph and the corresponding pump size selected.

The example shown here is based on a required capacity of 10 m³/h with a product viscosity of 6000 mPas. The dash-dotted line intersects the design capacity scale at 17 m³/h.