



Performance Curves


Alfa Laval LKH Prime/LKH Prime UltraPure 20

Motor:	60 Hz
	3500 rpm. synchron.
Tolerance:	±8% for Q
Tolerance:	±6% for H
Impeller, Max. dia.:	6.496" (165 mm)
Impeller, Min. dia.:	4.331" (110 mm)
Pump inlet, Dia.:	2.5" (63.5 mm, DN 65)
Pump outlet, Dia.:	2" (51 mm, DN 50)

Performance data refer to water at 68 °F. (20 °C)

NOTE! The curves refer to motor: 17.5 Hp (13 kW), 3547 rpm. asynchr., 60 Hz. For smaller motors, reduce head (H) with: 3%.

DO NOT FORGET THE SAFETY FACTOR.

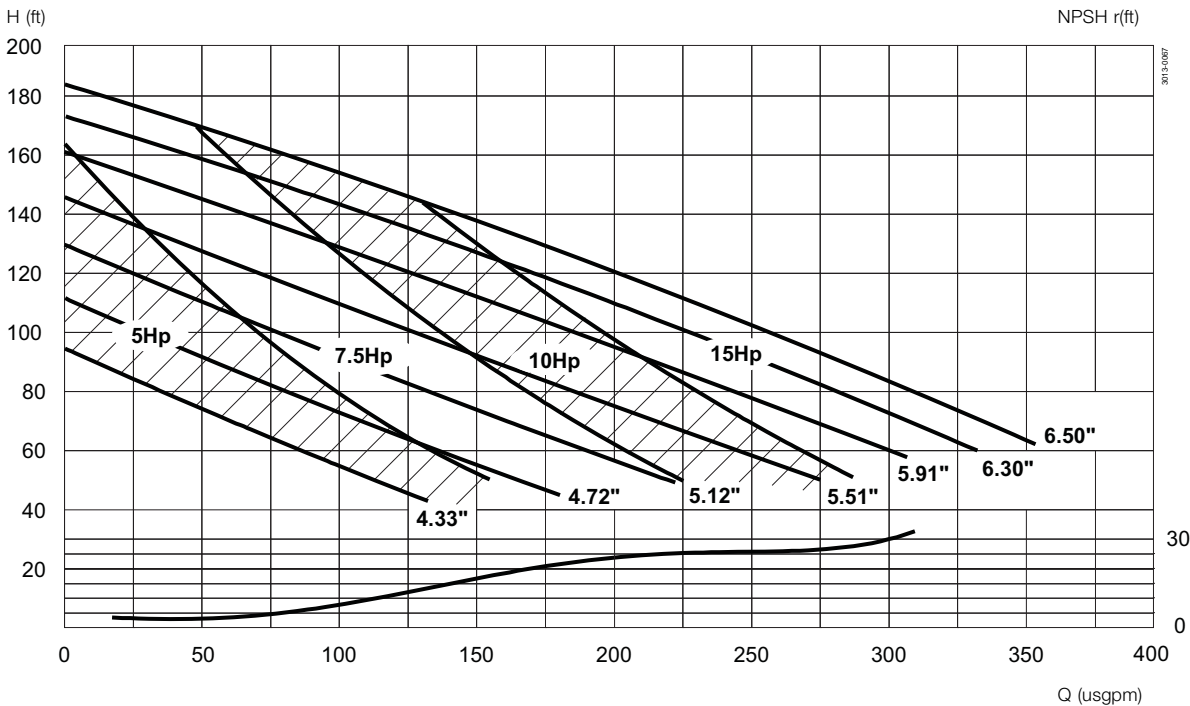

Alfa Laval reserves the right to change specifications without prior notification.

How to contact Alfa Laval

Contact details for all countries are continually updated on our website. Please visit www.alfalaval.us to access the information direct.



CSI

CONTACT CSI FOR MORE INFORMATION | CSIDESIGNS.COM | SALES@CSIDESIGNS.COM | 417.831.1411