

Alfa Laval Unique SSV Manually Operated

Single seat valves

Introduction

The Alfa Laval Unique SSV Manually Operated valve is a versatile, reliable single seat valve with a single contact surface between the plug and the seat to minimize the risk of contamination.

Its compact, modular and hygienic design meets the highest process demands in terms of hygiene and safety. It is built on the well-proven Alfa Laval Unique SSV platform. Few moving parts ensure easy dismantling, high reliability and low maintenance costs. A wide range of optional features, including lockable handles, enables customization to specific process requirements.

Application

The Unique SSV Manually Operated valve is designed for hygienic shutoff, tank outlet or straightforward regulating or dosing purposes across the dairy, food, beverage, brewery and many other industries.

Benefits

- Straightforward reliable design
- Cost effective and highly modular
- Exceptional valve hygiene
- Long service life
- Low total cost of ownership

Standard design

This manually operated single seat valve consists of one or two valve bodies, plug, sealing, crank mechanism, and clamp ring. The plug can be adjusted to a fixed position with a lock screw. Optional lockable handle is available.

The valve can be configured as a shutoff valve with two or three working ports or as a changeover valve with up to five ports. To ensure flexibility, the valve seat that sits between the two bodies in the changeover version is provided for assembly. The valve seals are optimized for durability and long service life through a defined compression design.

The valve can easily be converted to a pneumatic valve by replacing the crank mechanism with an actuator.



Using the Alfa Laval Anytime configurator, it is easy to customize to meet virtually any process requirement.

Working principle

The Alfa Laval Unique SSV Manually Operated valve operates manually using a crank mechanism to control pressure and flow through gradual opening and closing.

Certificates


 Authorized to carry the 3A symbol

TECHNICAL DATA

Temperature	
Temperature range:	14°F to +284°F (EPDM)
Pressure	
Max product pressure:	145 psi (10 bar)
Min. product pressure:	Full vacuum
ATEX	
Classification	II 2 G D*

*This equipment is outside the scope of the directive 2014/34/EU and must not carry a separate CE marking according to the directive as the equipment has no own ignition source.

Valve body combinations

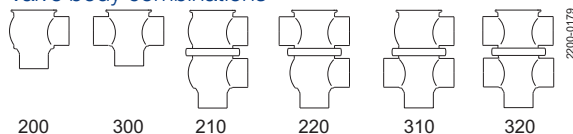

PHYSICAL DATA

Materials	
Product wetted steel parts:	AISI 316L
Other steel parts:	AISI 304
Plug seal:	EPDM
Optional plug seal:	PTFE (TR2)
External surface finish:	Semi-bright (blasted)
Internal surface finish:	Bright (polished), Ra < 32 µin
Other product wetted seals	EPDM
Optional product wetted seals:	HNBR and FPM

Options

- Weld ends or connection types other than Tri-Clamp.
- Product wetted seals in HNBR or FPM.
- Replacable elastomer plug seals (only for Manual Operated Valve).
- External surface finish blasted.



Note!

For further details, see instruction ESE00504ENUS.

Other valves in the same basic design

The valve range includes several purpose built valves. Below listed are some of the valve models available, though please use the Alfa Laval Anytime configurator for full access to all models and options.

- Standard valve.
- Reverse acting valve.
- Aseptic valve.
- Long Stroke valve.
- Tank Outlet valve.

Dimensions (inch)

Size	1	1.5	2	2.5	3	4
	inch	inch	inch	inch	inch	inch
A ₁	9.65	9.65	10.2	11.22	11.46	13.27
A ₂	10.24	10.43	11.18	12.2	12.64	14.45
A ₃	11.46	12.09	13.07	14.61	15.35	18.11
A ₄	11.93	12.76	13.94	15.47	16.42	19.17
C	1.88	2.39	2.91	3.4	3.89	4.87
OD	0.98	1.5	2.01	2.5	3	4
ID	0.86	1.37	1.88	2.37	2.87	3.84



CSI

CONTACT CSI FOR MORE INFORMATION | CSIDESIGNS.COM | SALES@CSIDESIGNS.COM | 417.831.1411

Size	1	1.5	2	2.5	3	4
	inch	inch	inch	inch	inch	inch
t	0.06	0.06	0.06	0.06	0.06	0.08
E ₁	1.97	1.95	2.40	3.19	3.39	4.69
E ₂	1.97	1.95	2.40	3.19	3.39	4.69
F ₁	0.59	0.79	0.98	0.98	1.18	1.18
F ₂	0.47	0.67	0.87	0.87	1.06	1.06
H	4.13	4.13	4.13	4.13	4.13	4.13
M/ clamp	0.5	0.5	0.5	0.5	0.5	0.63
Weight (kg)						
Shut off valve:	1.8	2	2.6	3.6	4.6	7
Change-over valve:	2.6	3	4.2	5.6	7.3	11.4

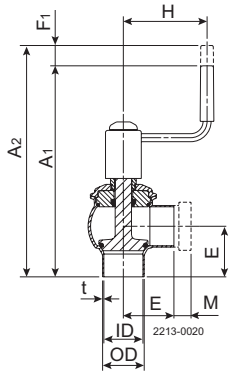


Figure 1. Shut off valve

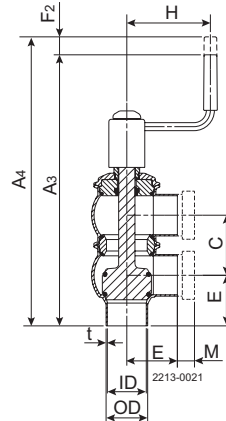


Figure 2. Change-over valve

Kv-Factors

Valve size	Kv
1.5"	14*/44
2.0"	75
2.5"	106
3.0"	171
4.0"	250

* optional

$Kv = m^3/h$ at a pressure drop of 1 bar.

For other pressure drops than 1 bar the flow can be calculated with the following formula:

$$Q = Kv \times \sqrt{\Delta p}$$

Where

Q = Flow in m^3/h .

Kv = See above.

Δp = Pressure drop in bar over the valve.

Example:

Plug Kv 75

Q to be calculated at $\Delta p = 2$ bar:

$$Q = 75 \times \sqrt{2} = 106 \text{ m}^3/h$$

or at 50% stroke:



CSI

CONTACT CSI FOR MORE INFORMATION | CSIDESIGNS.COM | SALES@CSIDESIGNS.COM | 417.831.1411

$$Q = 0.5 \times 75 \times \sqrt{2} = 53 \text{ m}^3/\text{h}$$

Pressure drop/capacity diagram:

The plugs have linear characteristics. This means that a certain amount of throttling, by reducing the stroke, results in a proportional reduction of the flow if the pressure drop remains unchanged.

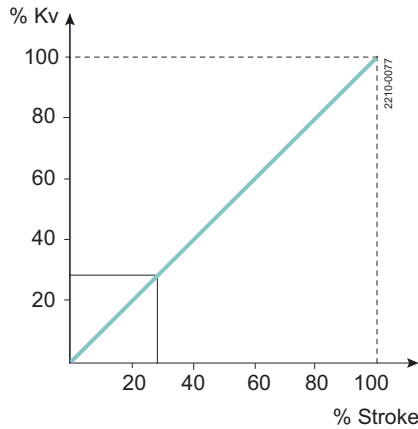


Figure 3. The flow in % of the total flow at a pressure drop of 1 bar

Dimensions (inch) - Unique Manually Regulating Valve

Size	1.5"	2"	2.5"	3"	4"
A1	6.93	7.48	8.50	8.74	10.60
A2	7.72	8.46	9.49	9.92	11.70
OD	1.50	2.01	2.50	3.00	4.00
ID	1.37	1.88	2.37	2.87	3.84
t	0.06	0.06	0.06	0.06	0.08
E1	19.50	2.44	3.23	3.43	4.72
E2	19.50	2.44	3.23	3.43	4.72
F1	0.79	0.98	0.98	1.18	1.18
H	3.15	3.15	3.15	3.15	3.15
M/ISO clamp	0.83	0.83	0.83	0.83	0.83
M/DIN clamp					
M/DIN male					
M/SMS male	0.79	0.79	0.95	0.95	1.38
Weight (kg)					
Shut off valve:	2.1	2.9	4.0	5.4	8.2

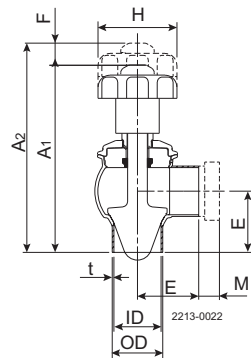


Figure 4. Dimensions



This document and its contents are subject to copyrights and other intellectual property rights owned by Alfa Laval Corporate AB. No part of this document may be copied, re-produced or transmitted in any form or by any means, or for any purpose, without Alfa Laval Corporate AB's prior express written permission. Information and services provided in this document are made as a benefit and service to the user, and no representations or warranties are made about the accuracy or suitability of this information and these services for any purpose. All rights are reserved.

200004006-2-EN-US

© Alfa Laval Corporate AB

How to contact Alfa Laval

Up-to-date Alfa Laval contact details for all countries are always available on our website at www.alfalaval.com



CSI

CONTACT CSI FOR MORE INFORMATION | CSIDESIGNS.COM | SALES@CSIDESIGNS.COM | 417.831.1411