
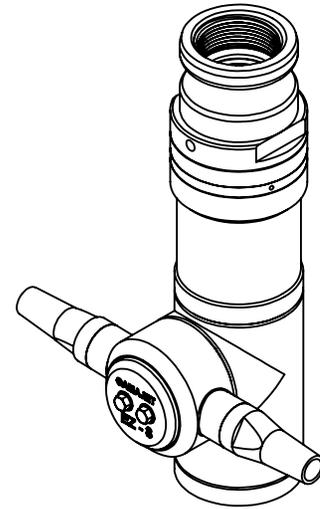


Combo 1-1/2" NPT & 2" Camlock Adapter Inlet

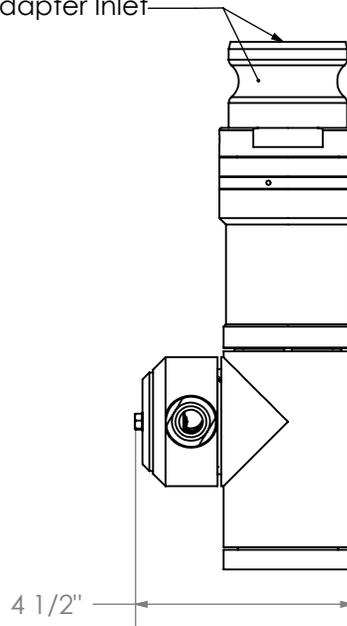

- Notes:
- 316 SS, 18-8 Fasteners, Plastics, and Elastomers
 - Weight: 14-1/2 lbs.
 - Dual (Shown) and Triple Nozzle Available
 - Nozzle Sizes: range from 1/4" to 1/2"
 - Flow Range: 25 to 100 GPM
 - Pressure Range: 20 to 1000 PSIG
 - Min Full Wash Cycle: 8 minutes

		Insertion Clearance (Inches)	
		Dual	Triple
Free Hand	Clutch	4-3/4	6-3/4
	Pin	8-1/2	7-3/4
Fixed Center Line	Clutch	6-1/2	8-7/8
	Pin	9-3/4	9-3/4

UNLESS OTHERWISE SPECIFIED
 * DIMENSIONS ARE IN INCHES
 * [] DIMENSIONS ARE mm
 * DEBURR ALL SURFACES
 * FILLET RAD.: 0.015
 * TOLERANCES:
 .XX ±0.01
 .XXX ±0.005
 ANGLE ±1°

MATERIAL:
 Various

FINISH (UNLESS OTHERWISE SPECIFIED):
 ??? Ra

SCALE: Full

GAMAJET CLEANING SYSTEMS, INC.
 2485 Yellow Springs Road
 Building One
 Malvern, PA 19355

TITLE: Dual Nozzle

EQUIPMENT: Gamajet EZ-8

DWG. NO.: EZ-8 Cut Sheet

SHEET 1 OF 1

THIS DRAWING IS THE PROPERTY OF GAMAJET CLEANING SYSTEMS, INC. REPRODUCTIONS AND USE OTHER THAN BORROWER'S AGREEMENT IS PROHIBITED. THIS DOCUMENT SHALL NOT BE LENT OR DISPOSED OF DIRECTLY OR INDIRECTLY NOR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IS SPECIFICALLY FURNISHED.

DRAWN	DATE	Rev.	Description
BFG	08/03/06	1	New Drawing
JAD	11/11/10	2	Updated Assembly and Drawing