
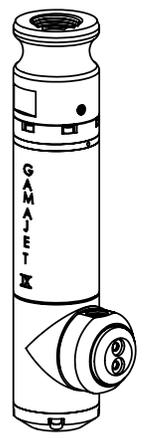


Combo 3/4" Female NPT & 1-1/4" Camlock Adapter Inlet

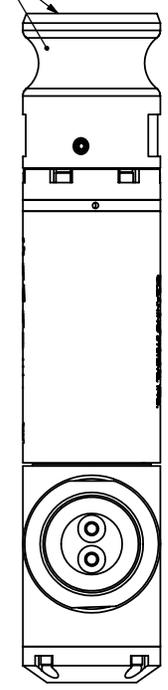

- Notes:
- 316 SS, 18-8 Fasteners, Plastics, and Elastomers
 - Weight: 5 lbs.
 - Nozzle Sizes: Range from 0.070" to 0.225"
 - Flow Range: 4 to 35 GPM
 - Pressure Range: 50 to 1000 PSIG
 - Min. Full Wash Cycle: 4 minutes.
 - Clearance: Min: 2.80", Fixed Centerline: 3.78"

THIS DRAWING IS THE PROPERTY OF GAMAJET CLEANING SYSTEMS, INC. REPRODUCTIONS AND USE OTHER THAN BORROWER'S AGREEMENT IS PROHIBITED. THIS DOCUMENT SHALL NOT BE LENT OR DISPOSED OF DIRECTLY OR INDIRECTLY NOR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IS SPECIFICALLY FURNISHED.

DRAWN	DATE	Rev.	Description
BFG	08/22/03	1	New Drawing
BFG	08/28/03	2	Changed nozzle size range.
BFG	02/13/06	3	Changed nozzle size range and operating condition range.

<u>UNLESS OTHERWISE SPECIFIED</u>	
* DIMENSIONS ARE IN INCHES	
* [] DIMENSIONS ARE mm	
* DEBURR ALL SURFACES	
* FILLET RAD.: 0.015	
* TOLERANCES:	
XX ±0.01	
XXX ±0.005	
ANGLE ±1°	
MATERIAL:	Material
FINISH (UNLESS OTHERWISE SPECIFIED):	??? Ra
SCALE:	Full

GAMAJET CLEANING SYSTEMS, INC.	
604 Jeffers Circle Exton, PA 19341-2524	
TITLE	Cut Sheet
EQUIPMENT	Gamajet IX
DWG. NO.	---
	SHEET 1 OF 1