

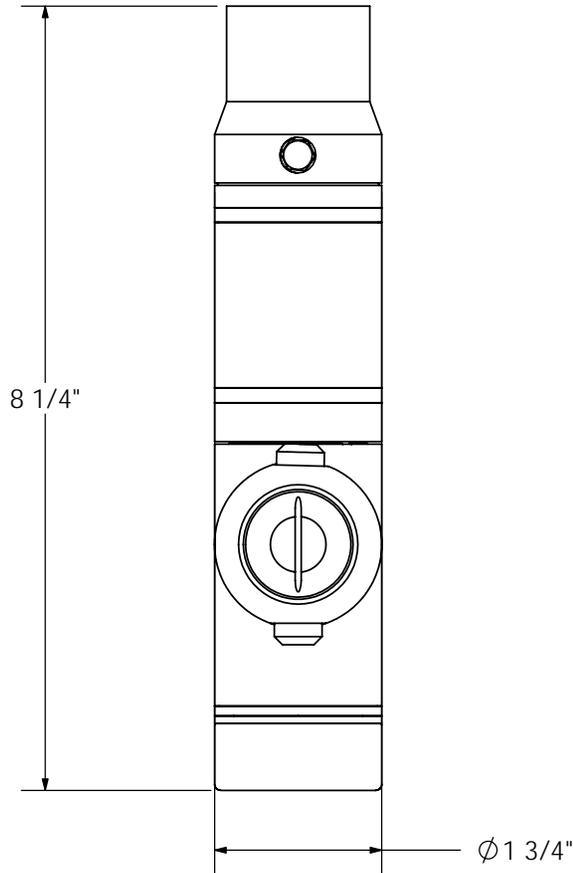


Notes:

- 316 SS, 18-8 Fasteners, Plastics, and Elastomers
- Weight: 4 lbs.
- Dual (Shown) and Triple Nozzle Available
- Nozzle Sizes: Range from 1/8" to 1/4"
- Flow Range: 5 to 40 GPM
- Pressure Range: 10 to 700 PSIG
- Min Full Wash Cycle: 10 minutes
- Clearances: Min: 2.8", Fixed-Centerline: 3-3/4"

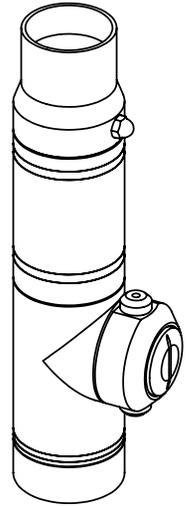

Inlet: 1-1/2" Butt Weld (Shown) or 1" Slip-Joint/Retaining Clip

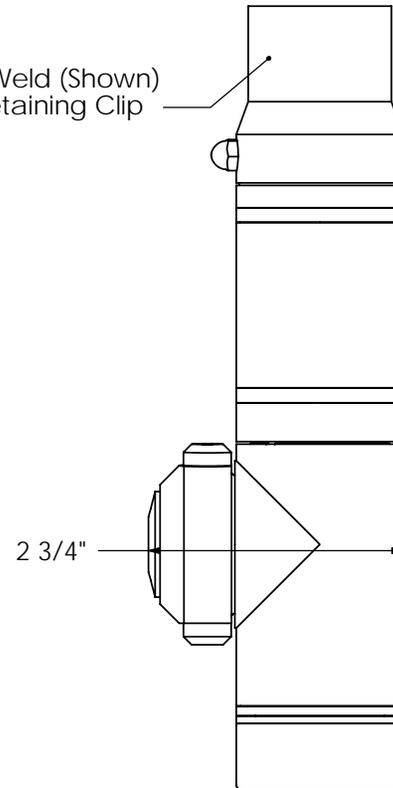

UNLESS OTHERWISE SPECIFIED:

- * DIMENSIONS ARE IN INCHES
- * [] DIMENSIONS ARE mm
- * DEBURR ALL SURFACES
- * FILLET RAD.: 0.015
- * TOLERANCES:
 - XX ±0.01
 - XXX ±0.005
 - ANGLE ±0.5°

GAMAJET CLEANING SYSTEMS, INC.

604 Jeffers Circle
Exton, PA 19341-2524

THIS DRAWING IS THE PROPERTY OF GAMAJET CLEANING SYSTEMS, INC. REPRODUCTIONS AND USE OTHER THAN BORROWER'S AGREEMENT IS PROHIBITED. THIS DOCUMENT SHALL NOT BE LENT OR DISPOSED OF DIRECTLY OR INDIRECTLY NOR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IS SPECIFICALLY FURNISHED.

| DRAWN | DATE | Rev. | Description |
|-------|----------|------|-------------|
| BFG | 10/12/01 | 1 | New Drawing |
| | | | |
| | | | |
| | | | |

| | |
|--------------------------------------|-----------|
| MATERIAL: | See Notes |
| FINISH (UNLESS OTHERWISE SPECIFIED): | 32 Ra |
| SCALE: | 1:2 |

| | | |
|-----------|--------------|--------------|
| TITLE | Cut Sheet | |
| EQUIPMENT | Aseptic 6 | |
| DWG. NO. | GJ Aseptic 6 | SHEET 1 OF 1 |