



Powder mixer and pump in one unit

Alfa Laval Hybrid Powder Mixer S15

Application

The stationary Alfa Laval Hybrid Powder Mixer S15 is a patented hygienic unit that both disperses powders into liquids quickly and efficiently and pumps the resulting solution at outlet pressure of up to 72 psi, all using a single motor. This versatile, easy-to-use mixer produces homogeneous products at high dry matter concentrations and high productivity.

The mixer is an excellent choice for use in a wide range of dairy, beverage and food powder mixing applications, e.g. for incorporating thickeners and stabilizers like pectin and xanthan and emulsifiers in the concentrations required in most applications. It is also capable of producing recombined milk with more than 50% dry matter.

Design

The Alfa Laval Hybrid Powder Mixer S15 is comprised of a two stage pump with one rotor-stator stage and one pump stage. The unit is fitted with a single motor and a funnel for introduction of powder through an injector system which can be isolated using a sanitary c-ball valve.



TECHNICAL DATA

US version: 230/460 VAC @ 60 Hz

Materials:

Product wetted steel parts: W. 1.4404 (316L) and Duplex steel
 Other steel parts: W. 1.4301 (304)
 Product wetted seals: EPDM, PTFE
 Other O-rings: EPDM
 Finish: Semi-Bright
 Internal surface roughness: Pipework acc. to DIN11850 Ra<32
 μ inch

(Note: Impellers: Blasted/machined)
 Shaft seal: Single mechanical SiC/SiC, flushed version

Flush tank: Approx. 1 ltr. incl. sight glass

Note: Flush through possible via easy connection

Power:

Installed power: 20 hp

Frequency drive

The HPM S15 should always be operated by use of a frequency converter.

Connections:

Liquid inlet connection: TriClamp 2"

Liquid outlet connection: TriClamp 1½"

Control of powder addition:

Manually actuated special C-Ball valve for dry ingredient adding

OPERATIONAL DATA

Technical data:

Recommended operation frequency 60 Hz (specially for thickeners and stabilizers)

Temperature range: 14°F to + 203°F

Recommended inlet pressure: 0.0 - 2.9 psi

Min. back pressure recommended: 14.5 psi

Dry ingredient capacity: Dependent on powder (for example, 6614 lb/h capacity for skimmed milk powder).

Noise level (at 1 m): < 90 dB(A)

Dimensions/weight:

HxWxL [inch]: 43.90 x 22.83 x 51.18

Weight: 507 lb

Motor:

Standard-C Face/Foot mounted NEMA motor with a fixed ball bearing on drive side, according to NEMA standard, 2 poles = 3600 RPM at 60 Hz, enclosure TEFC Wash Down

Other:

Funnel strainer.

Blind cover at powder inlet for use during CIP

Benefits

The Alfa Laval Hybrid Powder Mixer S15 provides a lower total cost of ownership of a powder-mixing system by combining powder mixer and pump function in one unit, thereby reducing installation costs. The system also allows the introduction of additional pressure-drop producing equipment downstream of the powder mixer, such as valves, heat exchangers, etc. without the necessity of installing an additional pump for boosting pressure. In addition, the simple design of the system keeps maintenance costs low. Furthermore, for a mixing application in a batch tank, the powder mixer can be configured in combination with an Alfa Laval Rotary Jet Mixer in such a way that the Hybrid Powder Mixer delivers the flow and pressure needed for the Rotary Jet Mixer.


Operation of the Alfa Laval Hybrid Powder Mixer S15

The two-stage inline Hybrid Powder Mixer is installed in a recirculation loop connected to a batch tank. After adding liquid ingredients to the tank, the Alfa Laval Hybrid Powder Mixer S15 is used to circulate the liquid over the tank. To provide high-efficiency mixing in tanks with volumes larger than 500 gallons it is recommended to install an Alfa Laval Rotary Jet Mixer in the tank by connecting it to the end of the circulation pipe.


Before powder is added in to the funnel, we have to make sure that no air is in the circulation pipe and a minimum pressure of 14.5 psi is build up after the HPM. After powder is introduced in the funnel, the C-Ball valve under the funnel is opened. The valve is the only component that the operator must control during introduction of the powder. The injector positioned under the valve creates an under pressure in the funnel outlet, drawing the powder into the rotor-stator stage of the pump and blending the powder and liquid into a homogeneous mixture. The impeller in the second stage of the pump transfers the powder-liquid mixture back to the tank while part of the powder-liquid mixture is sent through the injector creating the under pressure in the funnel outlet, which enables the suction of the powder into the liquid.

When mixing is complete, the Hybrid Powder Mixer may be used as a discharge pump or, when used with the Alfa Laval Rotary Jet Mixer, as a CIP forward pump – depending on the size of the tank and Rotary Jet Mixer - to clean the tank interior.

Pump Curve for the Alfa Laval Hybrid Powder Mixer S15

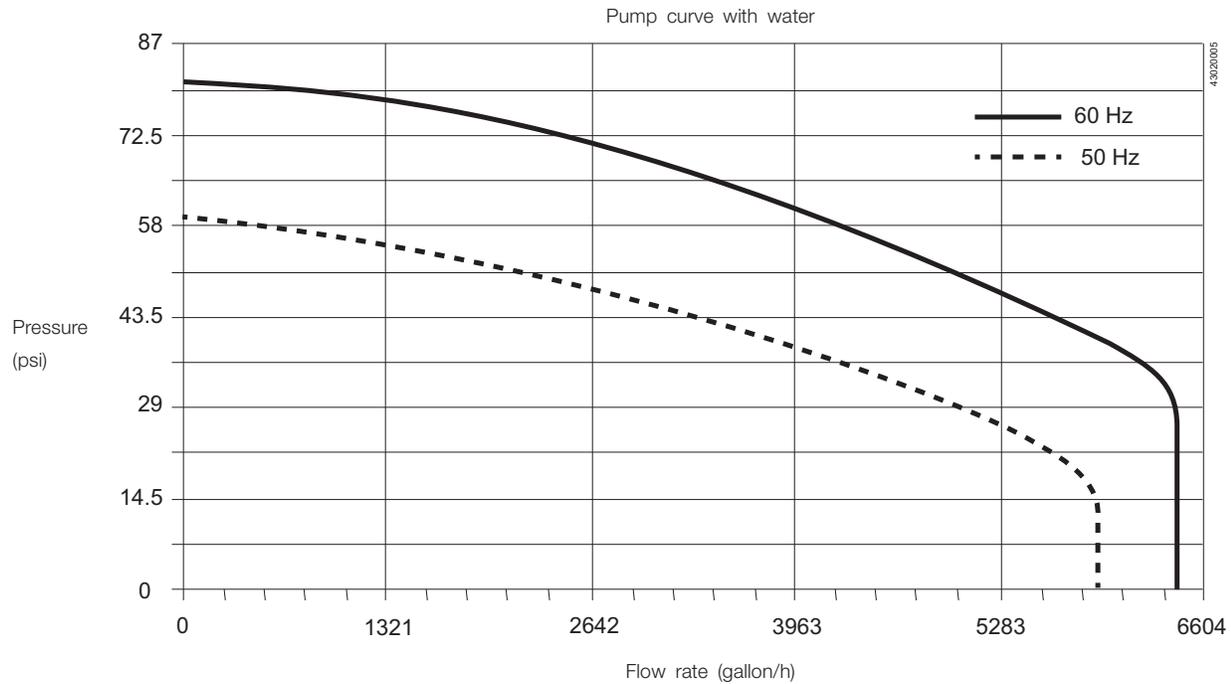

Example of setup with the Alfa Laval Hybrid Powder Mixer S15 and an Alfa Laval Rotary Jet Mixer

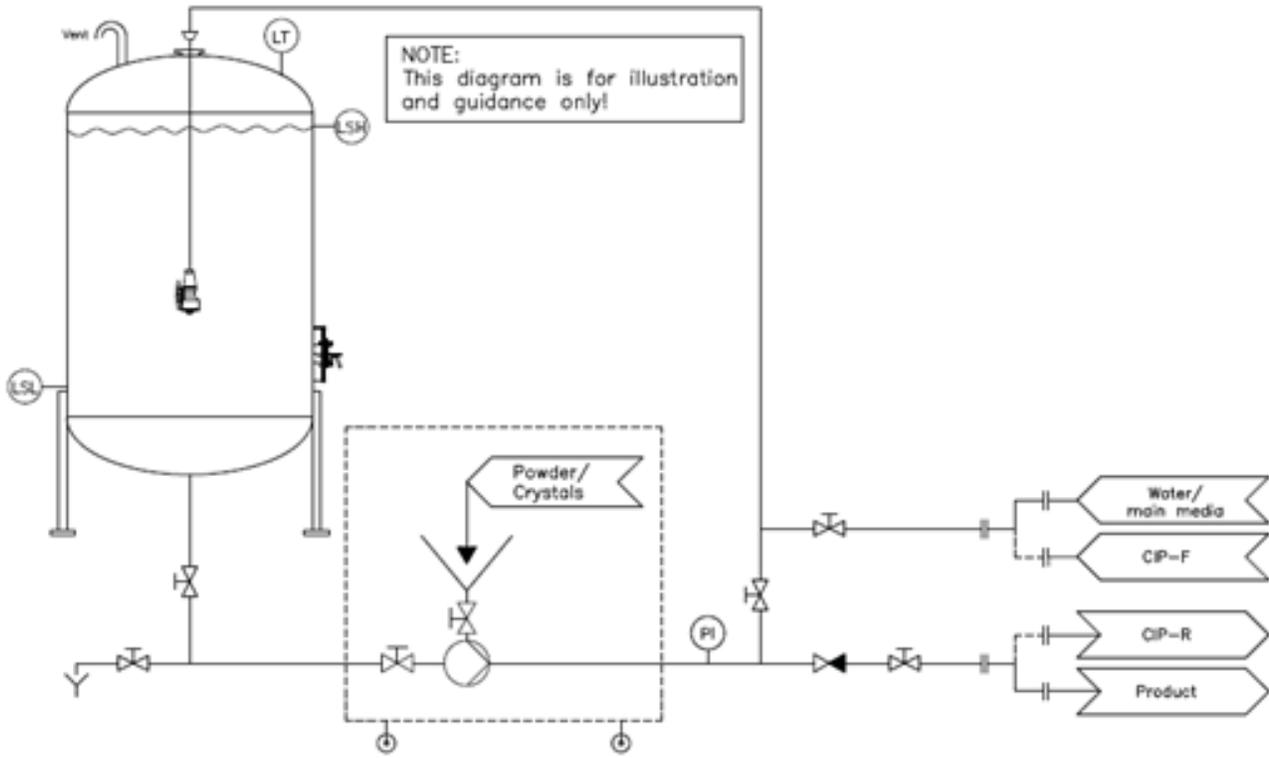



Alfa Laval reserves the right to change specifications without prior notification. ALFA LAVAL is a trademark registered and owned by Alfa Laval Corporate AB.

ESE02725ENUS 1507

© Alfa Laval

How to contact Alfa Laval

Contact details for all countries are continually updated on our website. Please visit www.alfalaval.us to access the information direct.