



## Superior Mixing – Liquid, Gas and Powder

### Alfa Laval IM 25 Rotary Jet Mixer

The patented IM 25 Rotary Jet Mixer (RJM) does not only mix fast, efficient and uniform but creates also the necessary process flexibility that makes it easy to switch to new product formulations with diverse viscosities, densities and volumes. Besides classic liquid to liquid mixing the RJM is excellent for gas and powder dispersion plus a superb tank cleaning machine.

#### Applications

Process and storage vessels between 2640 - 264170 US gallon used in a wide range of industries such as: beer & beverage, food & ingredients, home & personal care, health care, biotech and chemical industry etc.

#### Operation

Secure that the mixer is positioned in the correct level and submerged into the liquid before round pumping or when adding any additional products from any up-stream pipe works.



#### TECHNICAL DATA

Lubricant: . . . . . Self-lubricating with the mixing/cleaning fluid  
 Connection: . . . . . Standard thread 2.5" BSP, female  
 Min. tank opening: . . . . . See dimension drawings

#### Pressure

Working pressure: . . . . . 28-171 PSI  
 Recommended pressure during mixing: . . . . . 57-114 PSI  
 Recommended pressure during CIP: . . . . . 72-145 PSI

#### PHYSICAL DATA

##### Materials

Materials: . . . . . AISI 316L, AISI 316, SAF 2205, PEEK, PVDF, Carbon, Tefzel, Ceramics

Weight: . . . . . 26.9 lbs

##### Temperature

Max. working temperature: . . . . . 205°F  
 Max. ambient temperature: . . . . . 284°F


##### Benefits

Using the IM 25 Rotary Jet Mixer makes it possible, at a modest investment, to perform fast and efficient mixing in a sanitary system. In traditional systems, using propeller mixers, a rotating shaft penetrates the tank wall and a mechanical seal and a gear box are installed. With the Rotary Jet Mixing technology the shaft, seal and gearbox are eliminated, and a more sanitary design is obtained. With the Rotary Jet Mixing technology good mixing is achieved without the use of baffles. The Rotary Jet Mixing technology can also be used for gas dispersion and for dispersion and dissolving of powder. The IM 25 can furthermore be used for efficient CIP when the tank is empty, saving liquid, chemicals and energy compared to a fixed spray ball CIP system.

**Flow rate**

Relationship between inlet pressure and flow rate for liquids with waterlike properties for the IM 25 Rotary Jet Mixer.


**Volumetric flow rate**

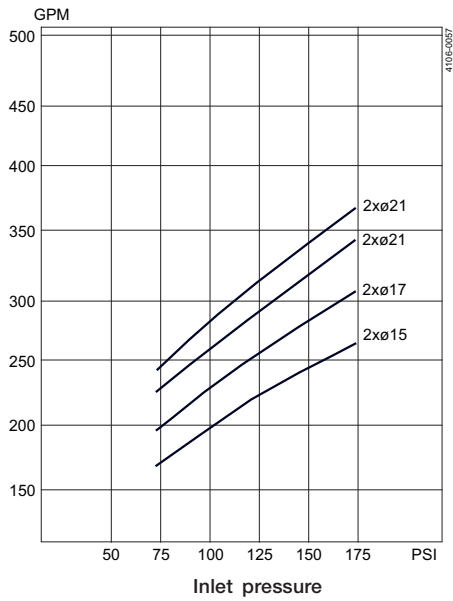



**Reach of jet**

Reach of jet (Wetting radius at static conditions) during cleaning

**Reach of jet**

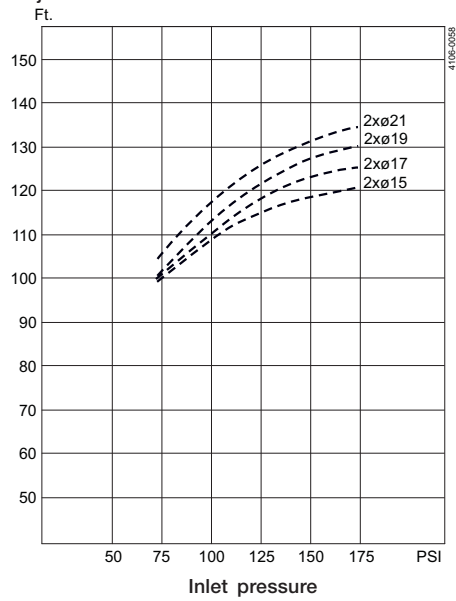

**Dimensions (inch)**

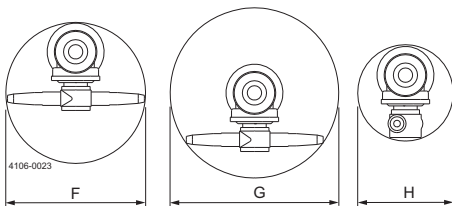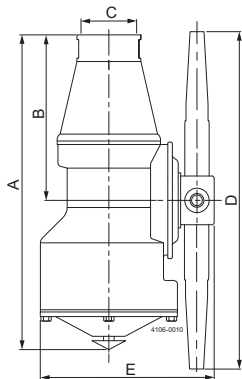


A = 2.5" BSP

A	B	C	D	E	F	G	H
11.26	6.10	3.15	13.27	8.66	ø13.50	ø16.69	ø8.78




**The Rotary Jet Mixing technology**




- A = Rotary Jet Mixer
- B = Gas
- C = Product
- D = Liquid feed

**Traditional Mixing technology**

**Round pumping**



**Propeller mixing**



- A = Liquid feed
- B = Product



Alfa Laval reserves the right to change specifications without prior notification. ALFA LAVAL is a trademark registered and owned by Alfa Laval Corporate AB.

ESE01570ENUS 1507

© Alfa Laval

---

**How to contact Alfa Laval**

Contact details for all countries are continually updated on our website. Please visit [www.alfalaval.us](http://www.alfalaval.us) to access the information direct.