



Product Information: Paperless Process Recorder

FOOD

Paperless Process Recorder with Legendary™ Cloud Software

Application/Specified Usage

- Paperless process recorder that will meet all PMO requirements
- Drop-in replacement for Anderson-Negele and most competitor existing paper recorders

Application Examples

- Continuous pasteurization in HTST, UHT, and Aseptic ranges
- Cold Product Recording
- Clean-In-Place (CIP)
- Clean-Out of-Place (COP)
- Juice Pasteurization
- Egg Pasteurization
- ESL Applications
- General Process Recording and Monitoring

Features

- 10" touchscreen display
- Pre-configure system information like operator list, product types, tank or silo list etc.
- Create and select from list of common annotations
- Scroll through all historical trends in local PPR display
- Internal redundant storage for data (up to 7 years) and charts (last 100 days)
- Unlimited cloud storage for both data and charts
- Data encryption during transmission to backup servers, preventing interception or falsification of records
- NEMA 4X enclosure

Advantages

- Create audit ready digital records that meet both your internal and PMO requirements
- Streamlined annotation and approval workflow for both on-premise PPR and Legendary™ cloud software
- Intuitive digital annotation including list of pre-populated common annotations
- Supervisors, quality team and PCQI can remotely review records, request additional notes from operators, and approve records
- Secure storage and access of all historical records for authorized users


System Overview

API Call from PPR to Legendary™

- Send new and revised charts for review, approval and backup
- Send task and approval updates
- Check for new tasks, annotations, approvals, workflow and user updates

Read from Legendary™ by web-enabled device

- Access legal records for review and approval
- Track approval status of legal records
- Track status of responses from operator and other associates

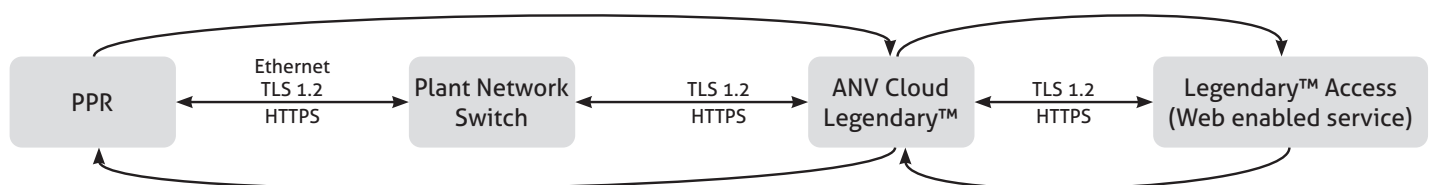

API Response from Legendary™ to PPR

- Respond with new tasks, annotations, approvals, workflow, and user updates

Write from web-enabled device to Legendary™

- Add notations
- Assign tasks (e.g. request annotation or more information)
- Add approvals


Paperless Process Recorder (PPR)



Legendary™ Cloud Software



Touchscreen Display Interface

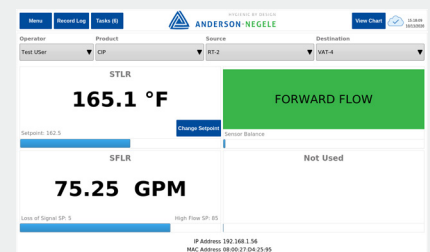

Specification			
Inputs	Number of Inputs Current Voltage RTD Scan Rate Recording Rate Recording Accuracy Ambient Temperature Effect	Up to 4 0-20mA, 4-20mA 0-25mV, 0-100mV, 0-1V, 0-10V, 1-10V Pt100 or Pt1000, 2 or 3 wire 100ms 3 seconds +/- 0.3% of span +/- 0.005% of span per °F deviation from 77°F (0.01% / °C from 25 °C)	
Outputs	mA Outputs Relay Outputs Digital Alarms	Up to 4; 0-20mA, 4-20mA Up to 4; Mechanical SPDT, Normally Open or Closed Contacts rated at 5 amps resistive at 115 VAC, 2.5 amps resistive at 230 VAC Up to 16	
Backup Storage	Removable Storage Non-Removable Storage Cloud Storage	supplied with 32GB microSD card. Contains last 100 days of Record Images & 24 hour backup record images 4 GB eMMC (Up to 7 years of raw data and annotations. Accessible only through HMI. Cannot be exported.) Unlimited storage of all PPR created record images in Legendary™	
Interface	Display Operating System	10" 1280x800 Touchscreen display with chemically strengthened glass with shatterproof screen protector Embedded Linux	
Cloud	Network Server Destination Domain TCP and UDP Ports Encryption Data Format Sync frequency IP Address	Ethernet/RJ45 Rackspace https://clients.intellex.com , https://preprod-na.intellex.com and their subdomains HTTP(80), HTTPS(443), DNS(53), SSH(22) HTTPS / TLS 1.2 or above JSON 15 minutes Dynamic or Static	
Power	Voltage Current	24-30VDC Max. Minimum 20V at PPR power supply terminals Max 2 amperes	
Enclosure	Mounting Option Material Conduit Openings Overall Dimensions Panel Depth Panel Cutout Front Panel Protrusion Water Ingress Rating Weight Vibration Accessories	Wall Mount / Surface Mount Stainless Steel Qty. 6, 7/8" diameter, Located on bottom 14"W x 15"H x 3"D N/A N/A N/A NEMA 4X 16 lbs. 3 to 100 Hz @ 0.2g Wall mount brackets and screws	Panel Mount (Through Panel) Stainless Steel Qty. 6, 7/8" diameter, Located on back 14"W x 15"H x 3"D 1.25" 12.7"W x 12.7" H + 6 holes for wiring 3" NEMA 4X 16 lbs. 3 to 100 Hz @ 0.2g Panel mounting bracket, gasket and nuts
Environment	Operating Temperature Humidity	32-122°F 10 to 90% RH, non-condensing	
Approvals	Electrical Water Ingress Rating	CE (Pending) NEMA 4X	
Warranty		2 Years	

Product code									
PPR	Paperless Process Recorder NOTE: Requires Annual Legendary™ Cloud Subscription								
	Safety Thermal Limit Recorder (STLR)								
XX	None NOTE: STLR options below include STLR relay and two input cards for dual PT1000 RTD STLR options require dual PT1000 sensor like SB probe (not included see page 5)								
TD	STLR with 24VDC relay								
T1	STLR with 110VAC relay								
T2	STLR with 220VAC relay								
	Safety Flow Limit Recorder (SFLR)								
X	None								
F	SFLR (only available with STLR option TD, T1, or T2; includes SFLR relay, one 4-20mA input card for SFLR and one additional universal input card)								
	Fixed								
	XXX								
	Additional Analog Inputs (Transmitter power supply not included, see spare parts)								
	With STLR Option XX								
4U	Four Inputs								
	With STLR Option TD, T1, or T2								
XX	None								
	mA Outputs/Re-Transmission								
XX	None								
2A	Two - Internally powered								
4A	Four - Internally powered								
	Additional Relay Outputs								
XX	None								
2R	Two								
4R	Four								
	Enclosure								
W	Wall Mount, Bottom Wiring								
P	Panel Mount w/Enclosure, Back Wiring								
	Tamper Evident Sealing Covers								
X	No (Only available with STLR Option XX)								
S	Yes								
	Fixed								
	XXXXX								
PPR	TD	F	XXX	XX	4A	4R	W	S	XXXXX

LEGENDARY™ CLOUD SOFTWARE SUBSCRIPTION	
Subscription purchase order must be sent to orders@anderson-negele.com directly by the end customer along with form 10035 Legendary™ Specification Sheet. Subscription fee is per PPR.	
CS-LD-36-XXXXXX	3 year subscription
CS-LD-60-XXXXXX	5 year subscription
IMPLEMENTATION SERVICE	
Implementation Service includes pre-configuration of PPR and Legendary™ to customer specific requirements	
CS-LD-XX-STRTUP	PPR and Legendary™ Implementation Service
STLR STARTUP KIT	
57219A0001	Transfer Switch Box for Series Recorder Control
SB...PPR...	Dual Head SB (See STLR Sensor Product Code on Page 5)
CS-LD-XX-STRTUP	PPR and Legendary™ Implementation Service

Notes